



10000±100mm

High Speed HDMI™ Cable with Ethernet E358026 AWM STYLE 20276 80°C 30V VW-1




HDMI A Male/G


IN:LDPE
OUT:45P Black PVC

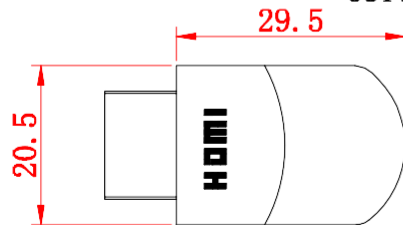

PIN Assignment

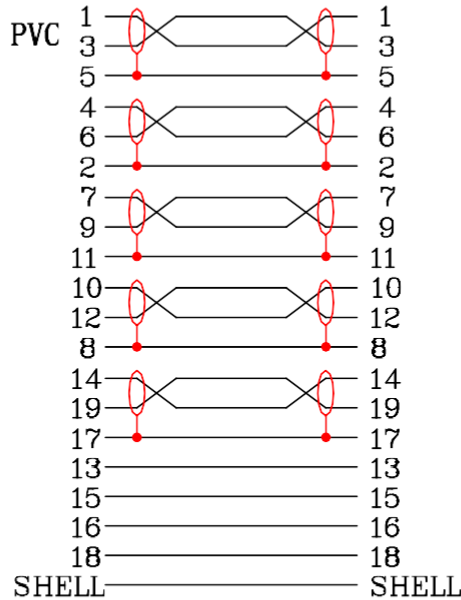


IN:LDPE
OUT:45P Black PVC

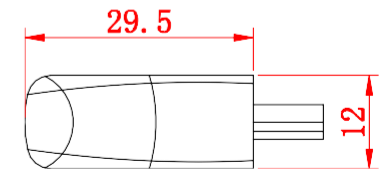

ELECTRICAL TEST:

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE:100HM MAX
3. INSULATION RESISTANCE:5M OHM MIN
4. HI-POT TEST:DC 300V/10ms

4	Cable:26AWG/Black/ OD:8.5±0.2	1	PCS
3	45P Black PVC	14	g
2	LDPE	10	g
1	HDMI A Male/G	2	PCS
NO.	Description	Q' TY	Unit

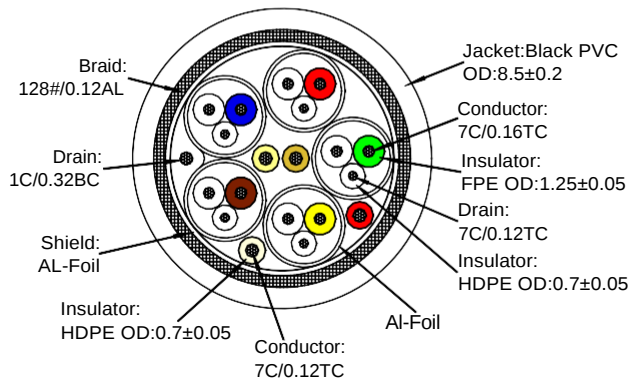

26AWG HDMI Cable

[(7C/0.16TC+FPE OD:1.25mm)*1P+7C/0.12TC+HDPE OD:0.7mm
+AL]*5P+(7C/0.12TC+HDPE OD:0.7mm)*4C+AL+1C/0.32BC+
128#/0.12AL+ PVC OD:8.5mm

CABLEMASTER™				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	1/1	UNITS: MM	3RD ANGLE
				MODEL NC,	HDMIV2-10M	△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO		△			
				FINISHING		△	2017/06/26		AC
				MATERIAL		SYM	DATE		REVISION