



**PIN Assignment**

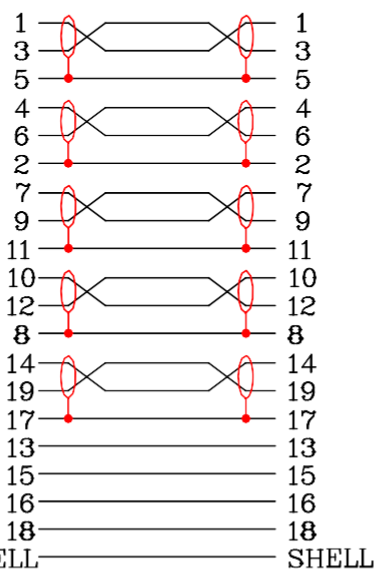

**ELECTRICAL TEST:**

1. 100% OPEN SHORT MIS WIRE TEST
2. CONTACT RESISTANCE: 5 OHM MAX
3. INSULATION RESISTANCE: 5M OHM MIN
4. HI-POT TEST: DC 300V/10ms

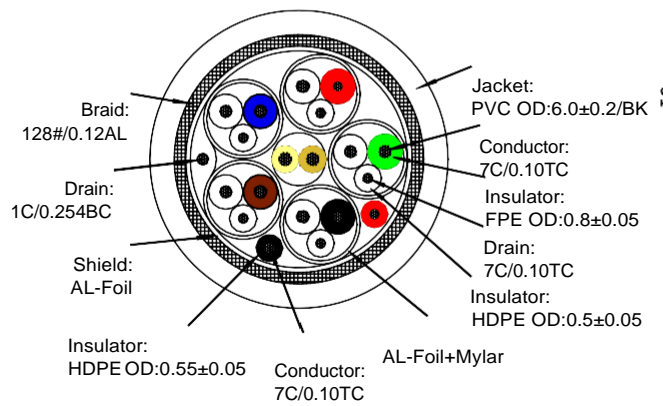

4	Cable: 30AWG/Black/φ6.0	1	PCS
3	45P Black PVC	14	g
2	LDPE	10	g
1	HDMI A Male/G	2	PCS
NO.	Description	Q' TY	Unit

CLIENT NO.	HDMIV2-1.5M	HDMI2-2M	HDMIV2-3M	HDMIV2-5M
LENGTH	1500±30mm	2000±30mm	3000±50mm	5000±50mm

[[ (1C/0.254BC+FPE OD:0.7mm)\*1P+1C/0.254BC+HDPE ID:0.55+AL]\*5P  
 +(1C/0.254BC+HDPEOD:0.55mm)\*4C+AL+1C/0.254BC+128#/0.12AL+PVC  
 OD:6.0mm

CABLEMASTER™				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	1/1	UNITS: MM	3RD ANGLE
				MODEL NO.		△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
			ELLA	FINISHING		△	2017/06/26		A0
				MATERIAL		SYM	DATE		REVISION